

LED Down Light


Description:

DLCB series downlight is classic recessed downlight with 2-way rotation ± 30 degree. Low glare and High CRI OSRAM & Bridgelux LED allow to produce fixture of endogenous lighting performance and high efficiency natural looking light

A compact design with superior thermal management makes this fixture perfect for any truly High-End commercial application.

Application:

- Shopping mall, Retail shop and fashion store lighting.
- Art gallery, furniture, museum and showroom lighting .
- Gym, , household, Restaurant.
- Food Lighting (Meat Fruit Vegetable Bread etc.)

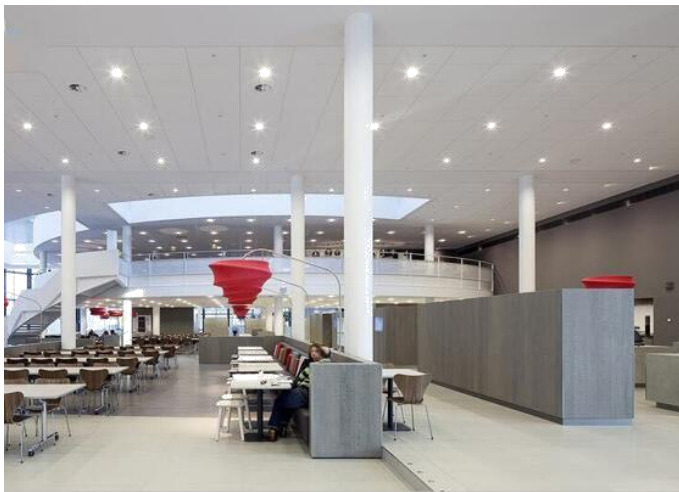

LED	5 YEARS WARRANTY	CE	SAA APPROVALS	MacAdam >3	IP 20	Hg 0.0mg
L 80 B 10	50000h			>100000	80% $\leq 1S$	220-240V 50/60Hz

Information:

Features:

- SDCM<3
- Extremely long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 ° C

Specification:

- Power supply : LIFUD PHILIPS
- Lighting Source: OSRAM BIDGELUX
- Power factor: >0.93.
- Housing material: aluminum.
- 2-way rotation ± 30 degree
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS



Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) ($\pm 5\%$)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout(m m)
OP-DLCB09W	AC220-240V AC100-277V	9W	OSRAM Bridgelux	900LM	14 24 38 60	2700K 3000K 4000K 5000K	90+/95+	$\Phi 90$ H50 mm	$\varnothing 80$ mm





03

Details



Lamp Body

High-end die casting aluminium

04

Details



Radiator

Efficient heat dissipation

05

Details



Spring

Good quality and durable in use

06

Details

30° Adjustable Angle

