

Anti-Glare LED Down Light

Description:

DLH H2 downlights range with shielded light source and precise cut off baffle reduces glare and improves visual comfort. Baffle available in Black or White. Honeycomb and prismatic diffusers optional. Round/Square/Twins/Triples heads options, Available in matt white and black finish

It is Ideal for for your planned retrofit or new constructing, Creating tremendous energy saving at a extremely affordable price



Application:

- Villa ,Lobbies, Corridors
- Hotel Lighting Restaurant
- Residential Lighting



Information:

Features:


- Deeply LED Inside with Anti-glare rings UGR<16
- 2 sides swing \pm 25 degree
- IP Rating : IP42
- Extremely long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 °C

Specification:

- Power supply :OSRAM Lifud
- Lighting Source: OSRAM
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS

Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (\pm 5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout(mm)
OP-DLH09W H2	AC220-240V	9W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	ϕ 85*H66mm	ϕ 75mm
OP-DLH15W H2	AC220-240V	15W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	ϕ 106*H77mm	ϕ 95mm
OP-DLH09WS H2	AC220-240V	9W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	L85*W85*H66mm	L75*W75mm
OP-DLH15WS H2	AC220-240V	15W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	L106*W106*H77mm	L95*W95mm
OP-DLH2*9W H2	AC220-240V	2*9W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	L168*W85*H66mm	L155*W75mm
OP-DLH2*15W H2	AC220-240V	2*15W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	L210*W106*H77mm	L198*W95mm
OP-DLH3*9W H2	AC220-240V	3*9W	OSRAM Bridgelux	100LM/W	15 24 36	2700K 3000K 4000K 5000K	90+	L247*W85*H66mm	L240*W75mm

Anti-Glare :

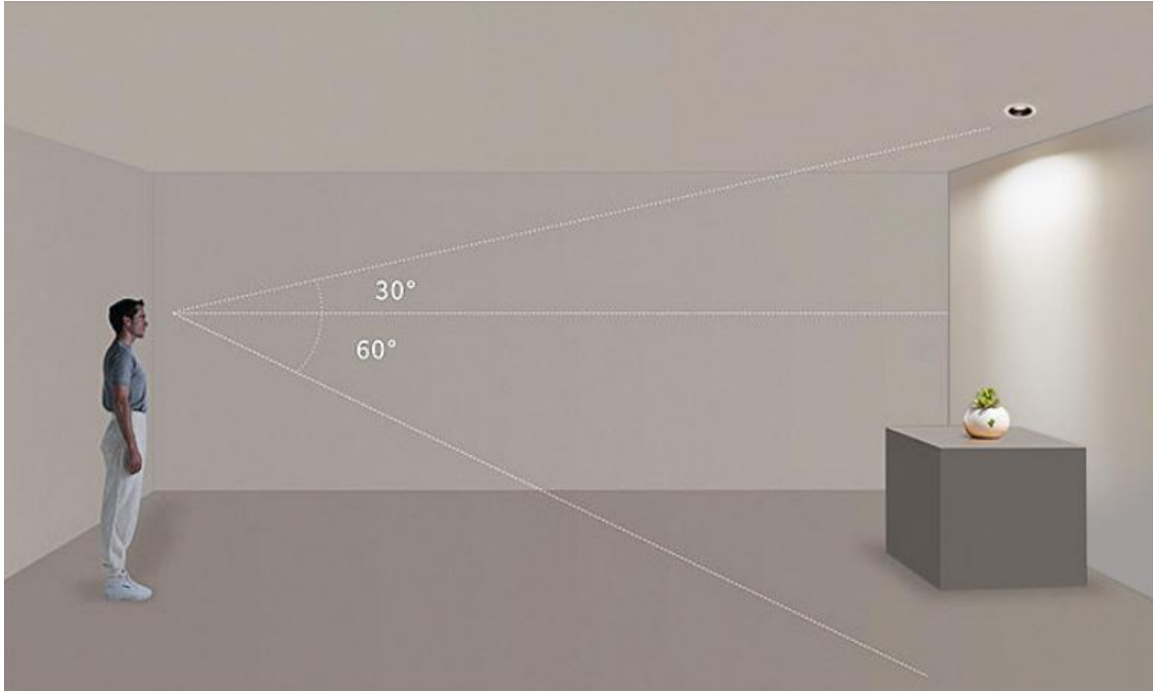

Adjustable :

