

## Eyeball Rotating Down Light

### Description:

**DLS** series is recessed adjustable Eyeball light being 360° rota-table in the horizontal plane and 30° adjustable in the vertical plane it can place light exactly where it is needed, minimizing any glare to customers, Giving you the option to control the direction of the light. This is great when you need the flexibility to change spotlighting. It has Round and Square and twins square models, it is ideal for shop and retail applications, where either accent lighting, or simply high flux lighting is required.

A compact design with superior thermal management makes this fixture perfect for any truly High-End commercial application.



### Application:

- Shopping mall, Retail shop and fashion store lighting.
- Art gallery, furniture, museum and showroom lighting .
- Gym, , household, Restaurant.
- Food Lighting ( Meat Fruit Vegetable Bread etc.)



## Information:

### Features:

- SDCM=3
- Extremely long lifetime
- Energy savings
- Maintenance savings
- instant light-up
- Excellent light quality
- No UV or IR radiation
- Environmentally-friendly: no mercury
- 360° rotation on horizontal and ±30° til-table
- Medium useful life > 50,000 hours (L80B50) at ambient temperature of 25 °C

### Specification:



- Power supply : Lifud Philips
- Lighting Source: OSRAM BIDGELUX
- Power factor: >0.93.
- Housing material: aluminum.
- Housing color: White Black
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS



Model No.	Input voltage(V)	Power (w)	LED Chip	Luminous flux (lm) (±5%)	Beam angle(o)	CCT (K)	CRI	Size (mm)	Cutout(m m)
OP-DLS15W S2	AC220-240V AC100-277V	15W	OSRAM Bridgelux	1500LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ110*95m m	Φ95- 100mm
OP-DLS30W S2	AC220-240V AC100-277V	30W	OSRAM Bridgelux	3000LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ135*119m m	Φ120mm
OP-DLS15W S2	AC220-240V AC100-277V	15W Square	OSRAM Bridgelux	1500LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ110*110*9 5mm	Φ100*10 0mm
OP-DLS30W S2	AC220-240V AC100-277V	30W Square	OSRAM Bridgelux	3000LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ135*135*1 19mm	Φ120*12 0mm
OP-DLS15W*2 S2	AC220-240V AC100-277V	2*15W Twins	OSRAM Bridgelux	2*1500LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ210*110*9 5mm	Φ200*10 0mm
OP-DLS30W*2 S2	AC220-240V AC100-277V	2*30W Twins	OSRAM Bridgelux	2*3000LM	15/24/38	2700K 3000K 4000K 5000K	90+	Φ255*135*1 19mm	Φ240*12 0mm

## Photo-metric :

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

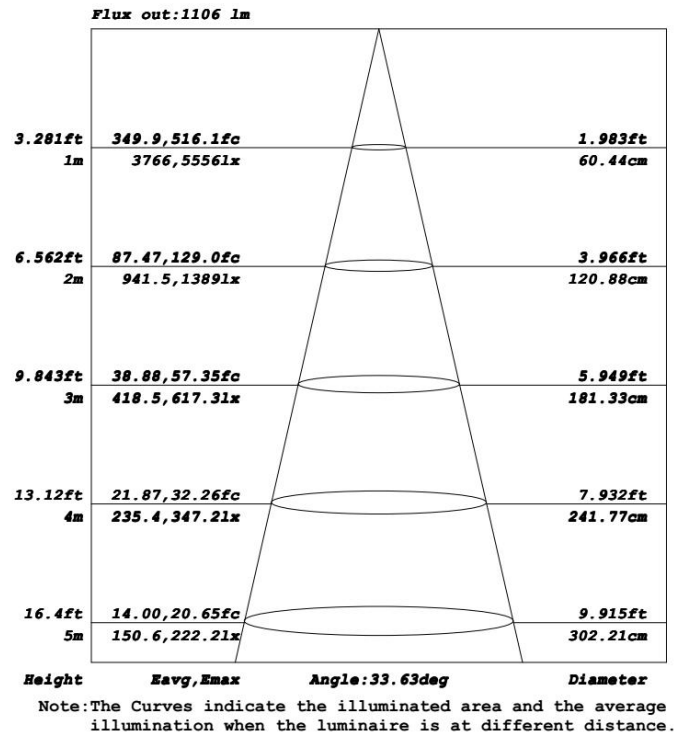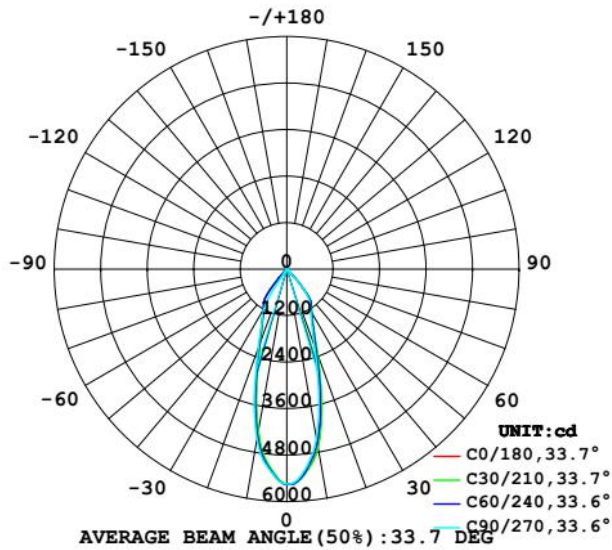

\* Please contact our sales for IES file

## Pictures :

