

LED Track Panel Light

Description:

The slim track panel could adjust the lights direction from 0-355 degree vertically according to the different project request, Wattages adjustable from 50W-57W-64W-75W. So it is smart and easy to make fixtures in stock for the wholesales, distributors, resellers and project contractors, which adjust the suitable characteristics in different end users or cases. This lamp with outstanding quality, 160LM/W high energy efficiency and 70000H super long service life for continuously high quality light to save your electricity bills. mostly of all, could be multiple installation, such as track system, recessed, surface mounted and suspension.




Application:

- Shopping mall, Supermarket and fashion store lighting.showroom lighting .
- Food Lighting (Meat Fruit Vegetable Bread etc.)






Dimension(mm)

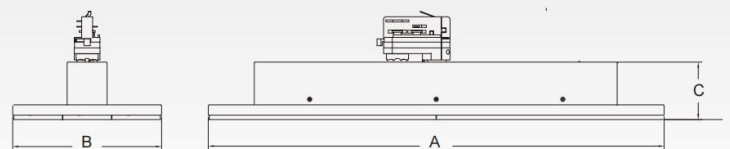

Model NO.	Size A(mm)	Size B(mm)	Size C(mm)
P01 600mm	578mm	189	76

Installation

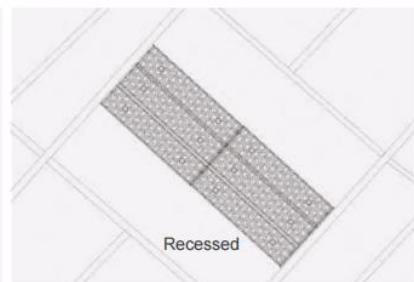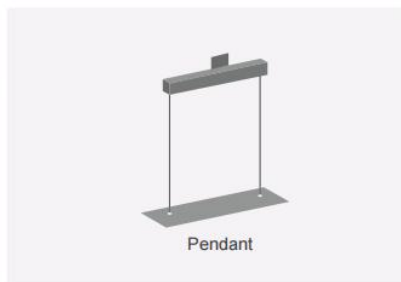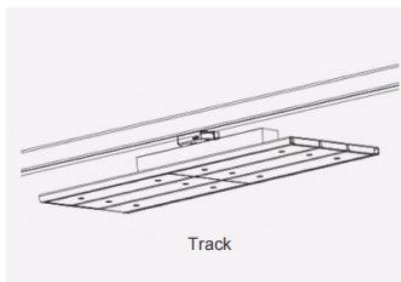




Information:

Features:


- Universal track adaptor, compatible with European 3-circuit tracks.
- Support track system (2wires, 3 wires and 4 wires), trimless recessed, surface mounted and pendant ways.
- 90% transmittance optical lens.
- Light distributions: narrow, spot, wide beam angle, asymmetric, double asymmetric
- Power switchable 70W can adjust 64w /57w/50w
- Flicker free driver compatible with ON/OFF, Dali, 0-10V, triac dimmable.
- Black and white housing

Specification:


- Power supply : TRIDONIC
- Track adapter: 4 wires 6 Wires
- Housing material: aluminum.
- Dimming : No/OFF DALI Dimmable
- Working environment temperature: -20oc ~ +45oc.
- Lamp Certificates: CE ROHS SAA
- Driver Certificates : TUV CB UL CE ROHS SAA

Ref. Photo	Installation	Model No.	Dimension	Power (w)	Luminous			Function
					Lumen	LM/W	Beam Angle	
	Powergear 4 Wires 3 Phase Track Adaptor	OP-TLP0121-70-TC	577×189 × 77mm	70W can adjust 64w /57w/50w	Max 11000LM	160 LM/W	30° 60° 90° DS25° DS25° x 60° x DS25° DS25° x 90° x DS25°	ON/OFF
	Powergear 6 Wires 3 Phase Track Adaptor	OP-TLP0121-70-T4		MAX 70W				DALI
	Powergear 4 Wires 3 Phase Track Adaptor	OP-TLP0123-70-TC	577×189 × 157mm	70W can adjust 64w /57w/50w	Max 11000LM	160 LM/W	30° 60° 90° DS25° DS25° x 60° x DS25° DS25° x 90° x DS25°	ON/OFF
	Powergear 6 Wires 3 Phase Track Adaptor	OP-TLP0123-70-T4		MAX 70W				DALI
	connecting cable with GST plug 18/3	OP-TLP0124-70-TC	577×189 × 77mm	70W can adjust 64w /57w/50w	Max 11000LM	160 LM/W	30° 60° 90° DS25° DS25° x 60° x DS25° DS25° x 90° x DS25°	ON/OFF
	connecting cable with GST plug 18/5	OP-TLP0124-70-T4		MAX 70W				DALI

Light distribution




60°




90°



DS 25°



DS 25° x 60° x DS 25°



DS 25° x 90° x DS 25°

Photo-metric :

